

## ***Installation tips***

**Remove the seat & put the sideplate bolts back in... Graphics are easier to install with the plastic still on the bike.**

**With paper towel & lacquer thinner, clean the plastic thoroughly... Acetone or brake cleaner work well too.**

**Repeat the cleaning step with fresh paper towel & lacquer thinner.**


**Note: New plastics require cleaning too!**

**First install the front plate, front fender, swingarms, fork guards and then the rear fender.**

**Remove the decal from its backing sheet and loosely lay into position using any mounting holes or defining shapes as a guide.**

**Rub down with your finger a band along the middle of the decal then working your way outward to avoid trapping bubbles.**

**Be sure to press down firmly into all recesses as you go.**

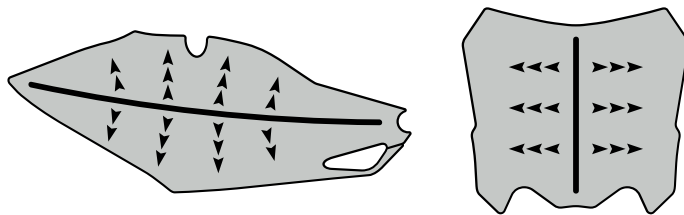

**When you reach the edges you may have tight bends or puckering that will require the heatgun.**

**Don't heat it up too much... put your hand near where you're heating... if it's too hot for your hand, it's too hot for the graphics.**

**Now install the shrouds (if the shroud is two decals, install the larger part first)**

**Install the left plate & then the right plate (it's the hardest one... all the others were practice for this moment)**

**Apply the airbox decals being sure to align any graphic elements to the sideplates.**

**Repeat the heatgun procedure wherever tight bends or stretching are required.**

**If it's misaligned or you get bubbles, just quickly pull back that area & continue the application.**

**After installation warm everything up with the heat gun while rubbing it down to ensure a secure bond.**